

## TOGGLE TYPE SAFETY VALVES

This valve has a double purpose. It serves as a safety valve and can also be used as a bleeder valve.

Available in all brass or stainless M.P.T. and nickel-plated brass body, with nylon handle.

Factory set relief pressures are shown below.

Blow off pressure range is  $\pm 10\%$  of actual rating. Other thread sizes on request.




Example:	S425	2	40
<b>1. Material</b>			
S425	Stainless Steel		
B40	Brass		
<b>2. Inlet Fitting</b>			
2	1/8" Male NPT		
4	1/4" Male NPT		
6	3/8" Male NPT		
Other thread sizes on request			
<b>3. Pressure Rating</b>			
40	40 PSI		
60	60 PSI		
100	100 PSI		
150	150 PSI		
180	180 PSI		
225	225 PSI		
275	275 PSI		

## STAINLESS STEEL BALL CHECK VALVE

Chudnow ball check valves are all stainless steel.

They are available in either single or double ball types.

All internal parts are interchangeable.

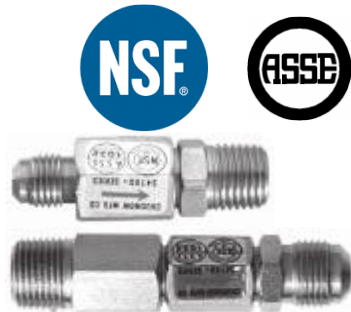

Example:	S470	4P4
<b>1. BODY / STYLE</b>		
S470	Single Ball	
S470D	Double Ball	
<b>2. CONNECTIONS</b> Select 2 numbers for inlet & outlet		
<b>MALE</b>	<b>FEMALE</b>	
4	F4	1/4" SAE
5	F5	5/16" SAE
6	F6	3/8" SAE
P2	FP2	1/8" NPT
P4	FP4	1/4" NPT
P6	FP6	3/8" NPT
SP2	FSP2	1/8" SPT
C	FC	1/2" CO2
H4	FH4	1/4" HOSE
H6	FH6	3/8" HOSE
Other thread sizes on request		