


TOGGLE TYPE SAFETY VALVE / RELIEF VALVES

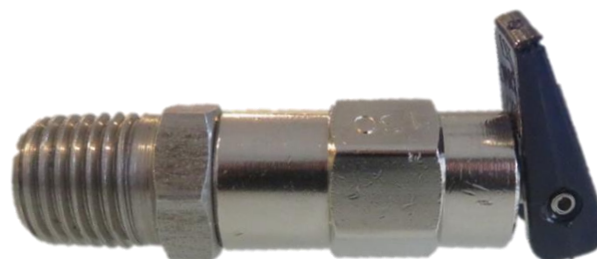

Double Purpose Valve

- Safety valve
- Bleeder valve

Standard Set Relief Pressures

- 40 psi
- 60 psi
- 100 psi
- 150 psi
- 180 psi
- 225 psi
- 275 psi

Blow off pressure range is ± %10 of actual rating

Standard Materials

- Stainless Steel
- Brass

The products illustrated in this catalog are not limited to the standard design shown. Because of their simplicity and versatility, with minor changes, they can be adapted to meet your special needs. We invite your inquires for your specific requirements.

Remember our motto **"if you don't see it ask for it"**

Example: S425 2 40

1. Material

| | |
|------|-----------------|
| S425 | Stainless Steel |
| B40 | Brass |

2. Inlet Fitting

| | |
|---|---------------|
| 2 | 1/8" Male NPT |
| 4 | 1/4" Male NPT |
| 6 | 3/8" Male NPT |

Other thread sizes on request

3. Pressure Rating (Handle Color)

| | | |
|-----------------------------------|---------|----------|
| 40 | 40 PSI | (Brown) |
| 60 | 60 PSI | (Black) |
| 100 | 100 PSI | (Orange) |
| 150 | 150 PSI | (Yellow) |
| 180 | 180 PSI | (Red) |
| 225 | 225 PSI | (Green) |
| 275 | 275 PSI | (Blue) |
| Other Ratings or color on request | | |